

**BONTRAGER****WHEEL SPECIFICATIONS**

Kovee Comp Front TLR Disc 29 Boost

Wheel Components

TCG Part Number	Description
576877	Wheel
574072	Hub
576906	Rim
W294200	Drive Side Spokes
W294200	Non-Drive Side Spokes (285mm 14ga. J-bend)
415760	Nipples
W406892	Tubeless Rim Strip
W527257	Tubeless Valve Stem

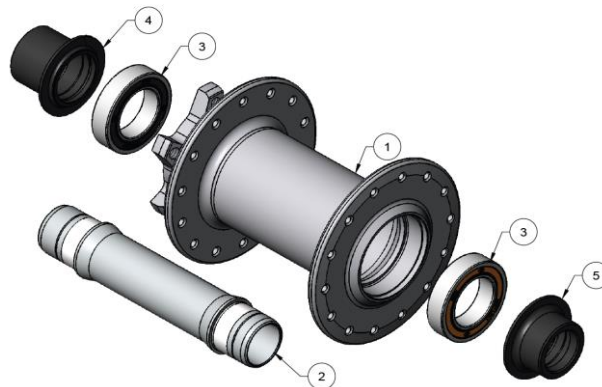
**Hub Service Parts**

Diagram Number	TCG Part Number	Description
1	NA	Hub Shell
2	516627	Axle
3	431759	30187 Bearing 18x30x7 (2 required)
4,5	431778	End Caps 15mm

Wheel Building Information and Specifications

Value	Description or Specification
Wheel Building Information	
0.5	Hop (mm)
0.5	Wobble (mm)
NA	Wheel stress level right side up (degrees of rotation, measured on Bontrager Stressor)
NA	Wheel stress level left side up (degrees of rotation, measured on Bontrager Stressor)
1.0	Dish (mm) - Maximum gauge reading (First side rim to endcap minus second side rim to end cap)
155 lbs min, 310 lbs max OR 70 kgf min, 140 kgf max	Spoke tension - disc side
Lacing pattern non-disc side	2 cross, woven. First hole CCW from valve hole is a pushing spoke (viewed from the non-disc side).
Lacing pattern disc side	2 cross, woven. First hole CCW from valve hole is a pulling spoke (viewed from the disc side).
Size Specifications	
286mm	Spoke length drive
285mm	Spoke length non-drive
604mm	Rim ERD
20.5mm	Rim height
27mm	Rim outer width
22.5mm	Rim hook bead width
NA	Rim spoke offset
Other Specifications	
NA	Wheel weight
Black/Black/Black	Wheel color
Black	Hub color
Black	Spoke color
Black/Black	Rim color
28	Spoke count
14G	Spoke gauge
6-Bolt	Disc bolt pattern
Yes	Tubeless ready

I

I

